




Power Tree

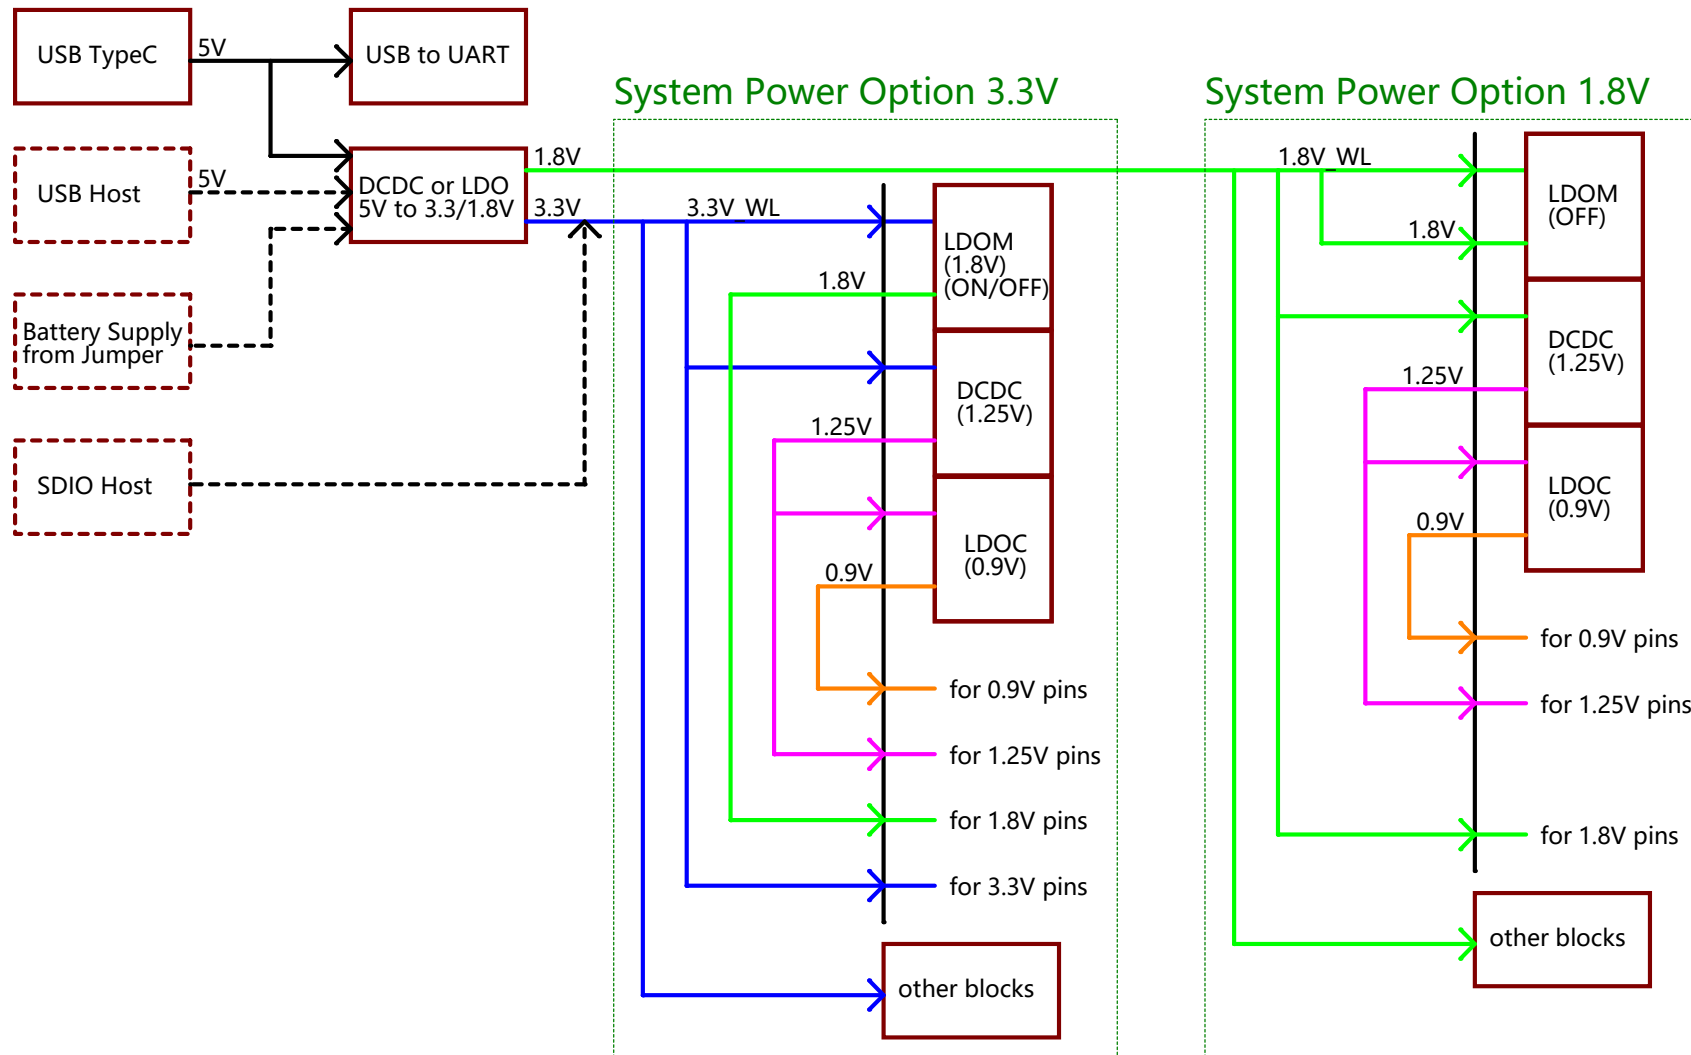


Block Diagram

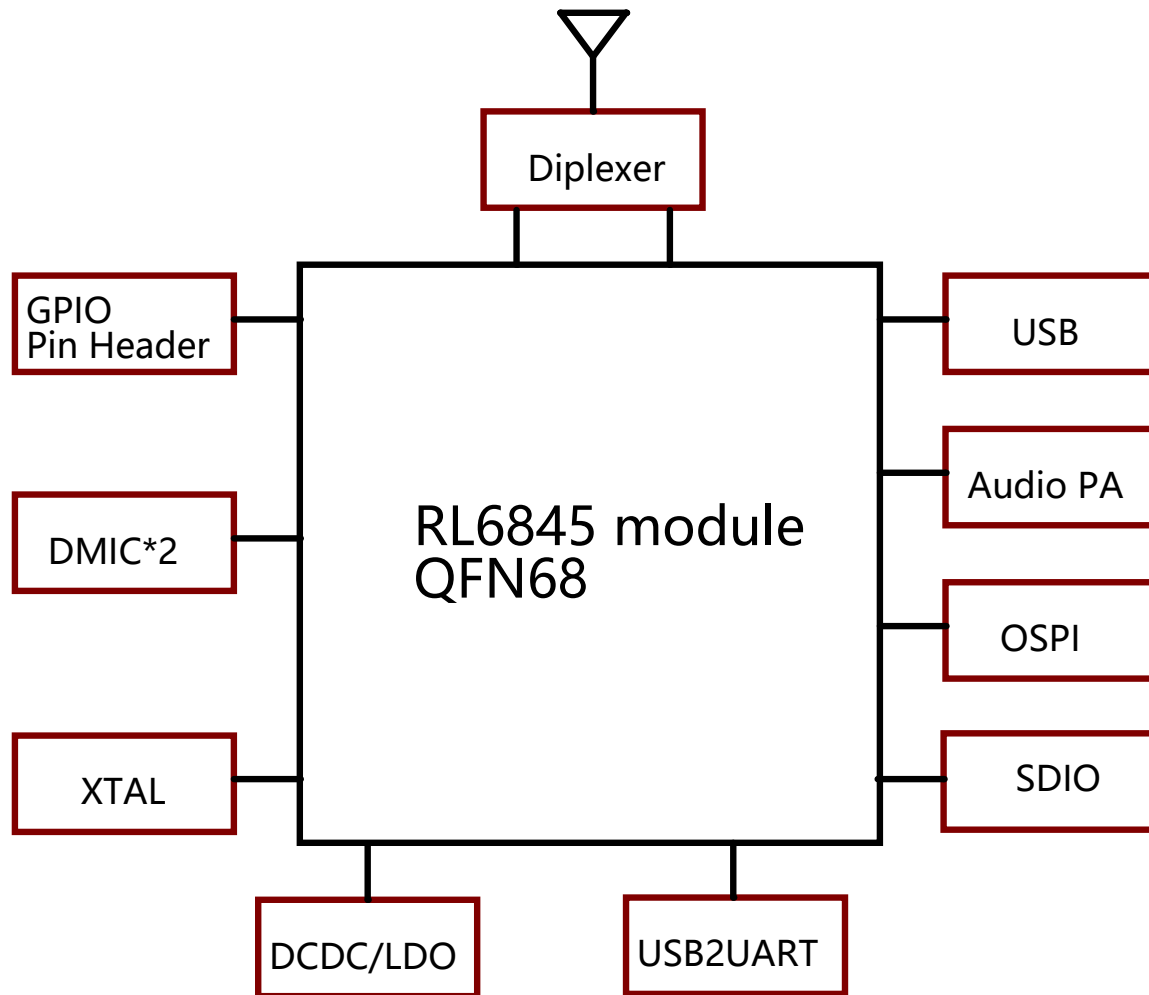


40 PIN Header

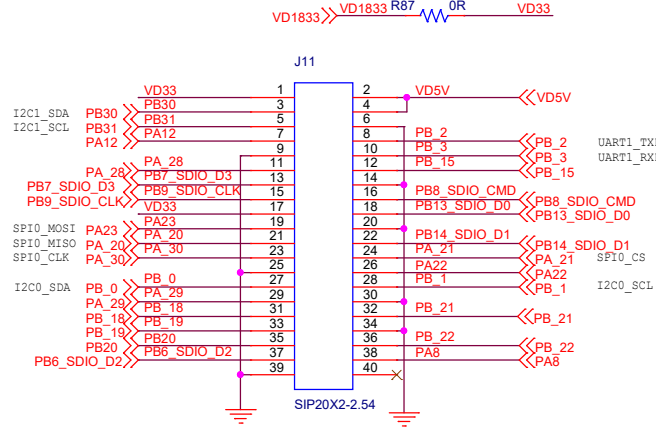


CAP TOUCH IF

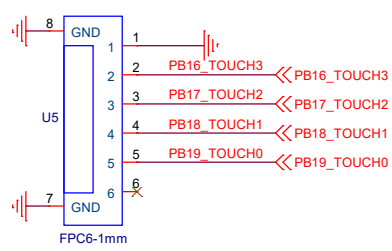


Others

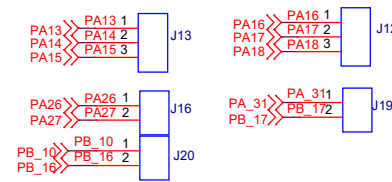


Pin Header for SDIO Golden Finger

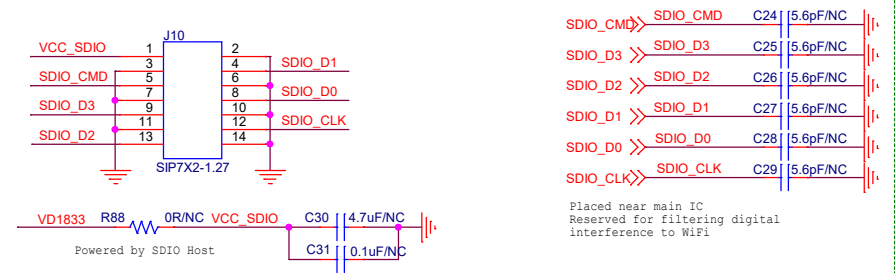


Download Button

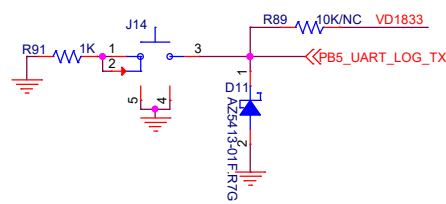


Chip_EN Button

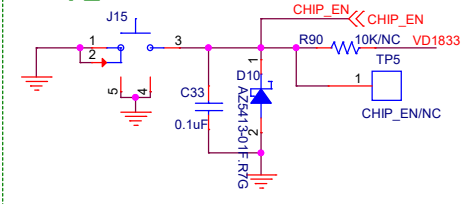


User LED

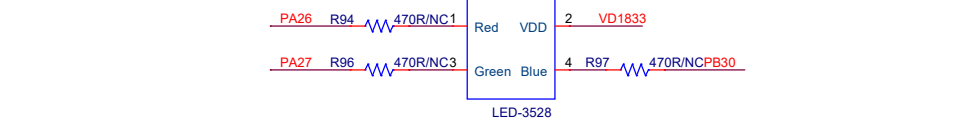

Reserve for internal test

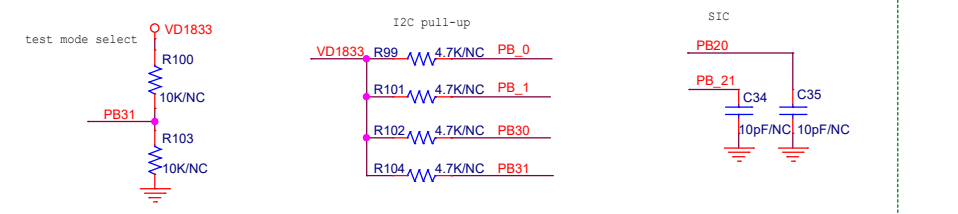

OSPI

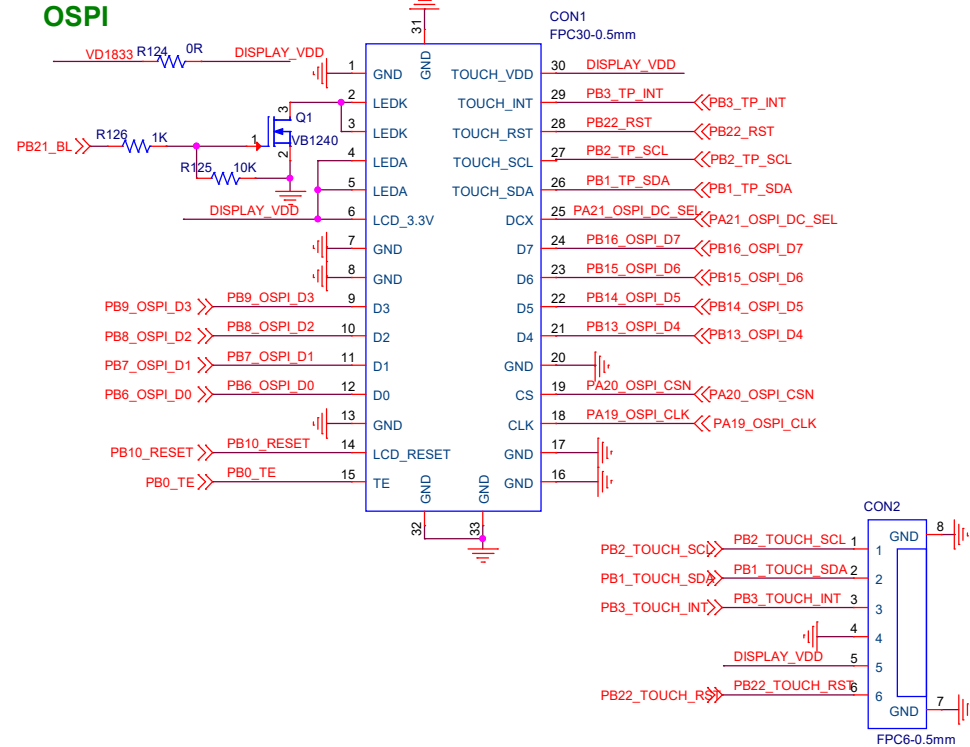


For module pins that require an E-gun test, such as CHIP_EN or UART, adding a TVS Diode and a serial resistor is recommended

Title		Function
Size	B	Document Number
Date:	Friday, February 28, 2025	Sheet 5 of 6


DMIC

L/R=HIGH, CLK=HIGH, DATA=VALID

L/R=LOW, CLK=LOW, DATA=VALID

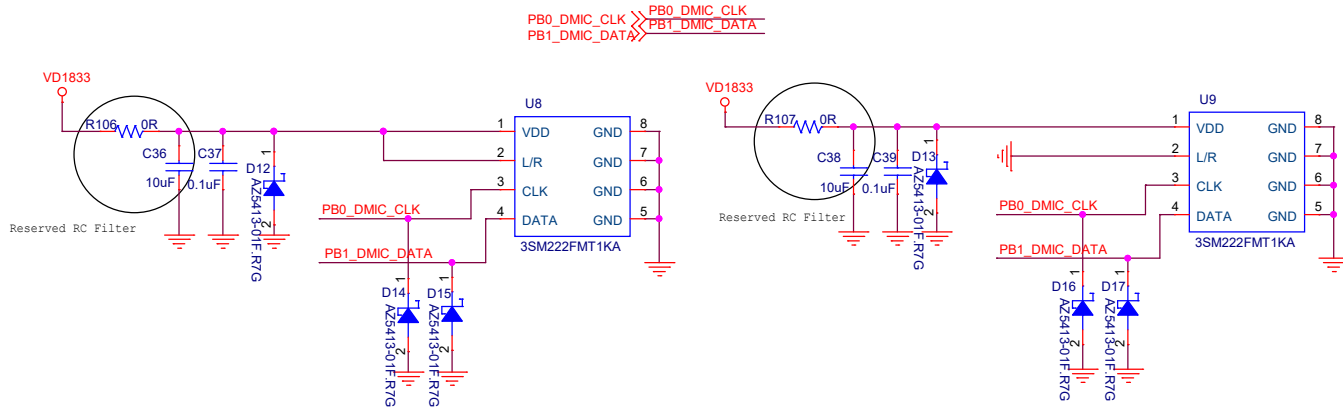

Audio Amplifier

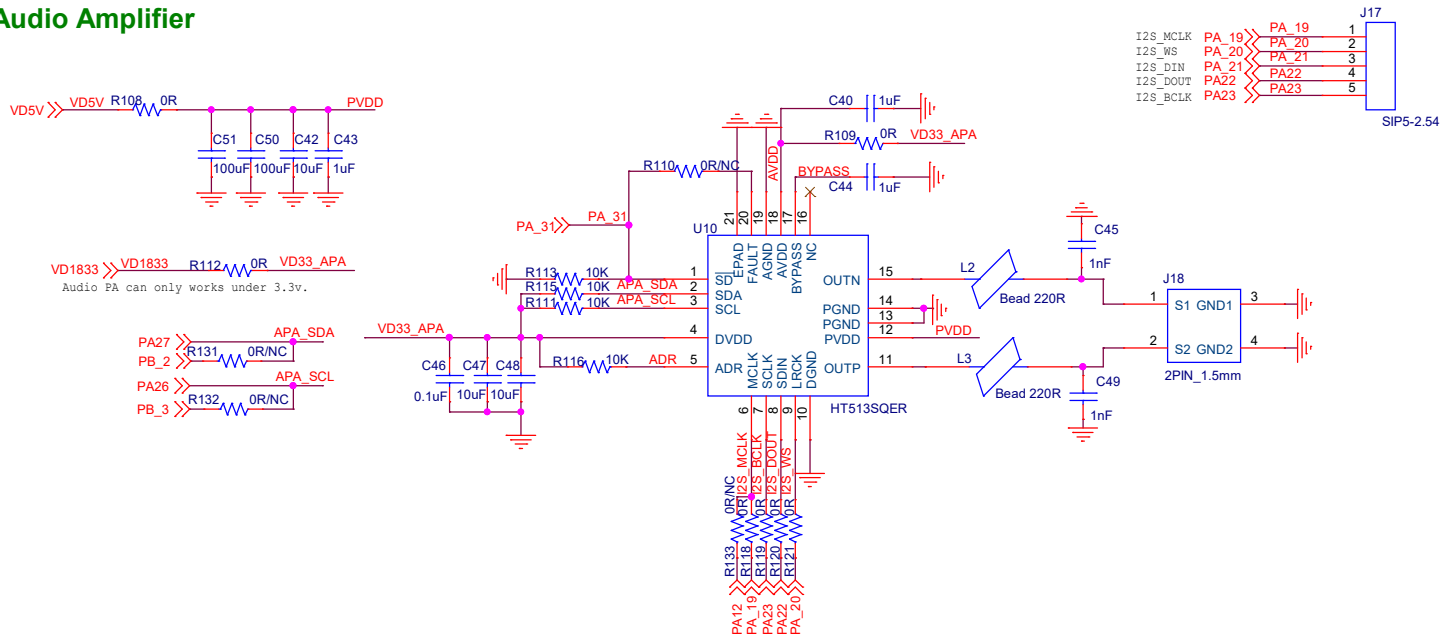

Title				Rev <RevCode>
Audio				
Size B	Document Number <Doc>			
Date: Friday, February 28, 2025				
Sheet		6	of	6