



PKM8713ECM-E10-F33 Module

DATASHEET

Rev. 1.2

Sep. 25, 2025



REALSIL MICROELECTRONICS (Suzhou) CO. LTD.

No. 128, West Shenhua Road, Suzhou Industrial Park, Suzhou, Jiangsu
Province, China

COPYRIGHT

©2025 Realsil Microelectronics (Suzhou) co. Ltd. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realsil Microelectronics (Suzhou) co. Ltd.

DISCLAIMER

Please Read Carefully:

Realsil Microelectronics (Suzhou) co. Ltd, (Realsil) reserves the right to make corrections, enhancements, improvements and other changes to its products and services. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

Reproduction of significant portions in Realsil data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Realsil is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions.

Buyers and others who are developing systems that incorporate Realsil products (collectively, "Customers") understand and agree that Customers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Customers have full and exclusive responsibility to assure the safety of Customers' applications and compliance of their applications (and of all Realsil products used in or for Customers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Customer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Customer agrees that prior to using or distributing any applications that include Realsil products, Customer will thoroughly test such applications and the functionality of such Realsil products as used in such applications.

Realsil's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation kits, (collectively, "Resources") are intended to assist designers who are developing applications that incorporate Realsil products; by downloading, accessing or using Realsil's Resources in any way, Customer (individually or, if Customer is acting on behalf of a company, Customer's company) agrees to use any particular Realsil Resources solely for this purpose and subject to the terms of this Notice.

Realsil's provision of Realsil Resources does not expand or otherwise alter Realsil's applicable published warranties or warranty disclaimers for Realsil's products, and no additional obligations or liabilities arise from Realsil providing such Realsil Resources. Realsil reserves the right to make corrections, enhancements, improvements and other changes to its Realsil Resources. Realsil has not conducted any testing other than that specifically described in the published documentation for a particular Realsil Resource.

Customer is authorized to use, copy and modify any individual Realsil Resource only in connection with the development of applications that include the Realsil product(s) identified in such Realsil Resource. No other license, express or implied, by estoppel or otherwise to any other Realsil intellectual property right, and no license to any technology or intellectual property right of Realsil or any third party is granted herein, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which Realsil products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of Realsil Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from Realsil under the patents or other Realsil's intellectual property.

Realsil's Resources are provided "as is" and with all faults. Realsil disclaims all other warranties or representations, express or implied, regarding resources or use thereof, including but not limited to accuracy or completeness, title, any epidemic failure warranty and any implied warranties of merchantability, fitness for a particular purpose, and non-infringement of any third party intellectual property rights.

Realsil shall not be liable for and shall not defend or indemnify Customer against any claim, including but not limited to any infringement claim that related to or is based on any combination of products even if described in Realsil Resources or otherwise. In no event shall Realsil be liable for any actual, direct, special, collateral, indirect, punitive, incidental, consequential or exemplary damages in connection with or arising out of Realsil's Resources or use thereof, and regardless of whether Realsil has been advised of the possibility of such damages. Realsil is not responsible for any failure to meet such industry standard requirements.

Where Realsil specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Customers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any Realsil products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death. Such equipment includes, without limitation, all medical devices identified by the U.S.FDA as Class III devices and equivalent classifications outside the U.S.

Customers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Customers' own risk. Customers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Customer will fully indemnify Realsil and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.

TRADEMARKS



is a trademark of Realsil Microelectronics (Suzhou) co. Ltd. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

USING THIS DOCUMENT

This document is intended for the software engineer's reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide.

Contact Us

- Official website: <https://www.realmcu.com>
- Development documents: <https://aiot.realmcu.com/docs/>
- Official forum: <https://www.realmcu.com/community/cimd>
- Sample purchase: <https://shop467975900.taobao.com>
- Business cooperation: iot_sales@realsil.com.cn
- Technical support: iot_support@realsil.com.cn
- SDK website: <https://github.com/Ameba-AIoT/ameba-rtos>

Contents

Contact Us	4
Contents	5
1 Module Overview	6
1.1 General Description	6
1.2 Features	6
2 Module Block Diagram.....	7
3 Module Pin Definition.....	8
3.1 Module Pin Layout.....	8
3.2 Module Pin Description	8
3.2.1 Pin Description.....	8
3.2.2 Strapping Pins.....	9
4 RF Characteristic	11
4.1 Wi-Fi Radio Standard	11
4.1.1 Wi-Fi 2.4GHz Band RF Transmitter Specification	11
4.1.2 Wi-Fi 2.4GHz Band RF Receiver Specification	11
4.2 Bluetooth Radio Standard	12
4.2.1 Bluetooth BR RF Transmitter Specification	12
4.2.2 Bluetooth BR RF Receiver Specification	13
4.2.3 Bluetooth EDR RF Transmitter Specification	13
4.2.4 Bluetooth EDR RF Receiver Specification	14
4.2.5 Bluetooth LE RF Transmitter Specification	14
4.2.6 Bluetooth LE RF Receiver Specification	14
5 Module Electrical Characteristics	16
5.1 Module Operating Conditions	16
5.2 Module DC Characteristics	16
6 Module Schematics	17
6.1 Module Internal Schematics.....	17
7 Physical Dimensions	18
8 Product Handling	19
8.1 Storage Conditions.....	19
8.2 Production Instructions	19
8.3 Recommended Oven Temperature Curve	20
9 Revision History	21

1 Module Overview

1.1 General Description

The PKM8713ECM-E10-F33 is a multi-radio MCU module. With the open CPU architecture, customers can develop advanced applications running on the dual RISC cores. In addition, the embedded audio codec and digital signal processor (Cadence® Tensilica® HiFi 5 DSP) can run rich AI voice algorithms. The radio provides support for Wi-Fi 802.11 b/g/n/ax in the 2.4GHz band with 20MHz bandwidth and BLE 5.2 communications. The high integration and high performance make it an ideal choice for smart home appliances, AI toys, smart Bluetooth speakers, etc.

1.2 Features

Chipset and Memory:

- RTL8713ECM chipset embedded, triple-core processor: HiFi 5 DSP up to 500MHz, KM4 up to 400MHz and KR4 up to 400MHz
- on-chip memory: 768KB SRAM
- 16MB MCM PSRAM
- 16MB Flash

Wi-Fi:

- 802.11 b/g/n/ax 1x1, 2.4GHz
- Center frequency range of operating channel: 2412MHz ~ 2484MHz
- Support 20MHz bandwidth, up to the data rate of MCS9
- Wi-Fi WPA, WPA2, WPA3, WPS; open, shared key, and pair-wise key authentication services
- Power-saving mechanism
- Supports AP/STA/Concurrent mode (802.11ax AP not supported)
- Frame aggregation for increased MAC efficiency (A-MPDU)

Bluetooth Low Energy:

- Bluetooth LE: Bluetooth 5.2 (LE-1M/LE-2M/LE-Coded PHY (long range))
- Supports both 500kbps and 125kbps LE-Coded PHY (long range)
- Support LE secure connections
- AoA and AoD (both connection-oriented and connectionless)
- Supports both flooding-mode and scatter-mode SIG mesh
- Supports scatter-net (concurrent central and peripheral mode)
- Co-existence RF design between Wi-Fi and Bluetooth

Peripherals:

- Built-in a low-energy Voice Activity Detection (VAD)
- 3-channel Audio ADC and mono audio DAC
- 4-channel digital microphone interface supported
- 4 x UART interface, baud rate up to 8Mbps within high-speed mode (40MHz)
- 2 x I2C, three speed modes: standard up to 100Kbps, fast up to 400Kbps, high to 3.4Mbps
- 2 x SPI Master/Slave, baud rate up to 50MHz
- 8 x PWM with configurable duration and duty cycle from 0 ~ 100%
- Cap touch x 9 channels
- ADC x 6 channels
- 24 x programmable GPIOs

Antenna Option:

- On-board PCB antenna

Operating Conditions:

- Operating input voltage: (3.3 ± 10%)V
- Operating ambient temperature: -20°C to 85°C

2 Module Block Diagram

This module includes the chipset, crystal component, Flash memory, R/L/C components for RF matching, decoupling and RF radio antenna.

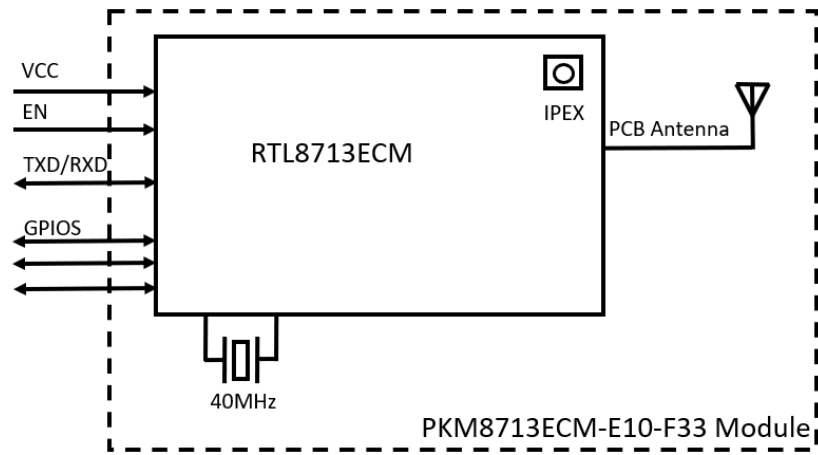


Figure 1. Block Diagram

3 Module Pin Definition

3.1 Module Pin Layout

This module has 54 pins.

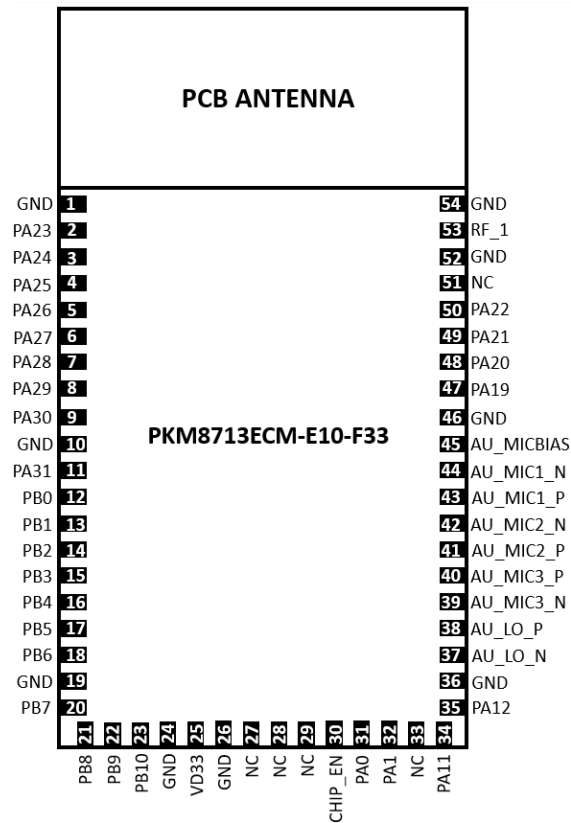


Figure 2. Module Pin Layout (Top View)

3.2 Module Pin Description

3.2.1 Pin Description

Table 1. Pin Description

Pin Name	Pin No.	Type	Description	UART is available	I2C is available	PWM is available
GND	1	P	Ground	NA	NA	NA
PA23	2	I/O	GPIOA_23 / DMIC_CLK	√	√	√
PA24	3	I/O	GPIOA_24 / DMIC_DATA	√	√	√
PA25	4	I/O	GPIOA_25 / UART0_TXD	√	√	√
PA26	5	I/O	GPIOA_26 / UART0_RXD	√	√	√
PA27	6	I/O	GPIOA_27	√	√	√
PA28	7	I/O	GPIOA_28 / SPI0_CLK	√	√	√
PA29	8	I/O	GPIOA_29 / SPI0_MOSI	√	√	√
PA30	9	I/O	GPIOA_30 / SPI0_MISO	√	√	√
GND	10	P	Ground	NA	NA	NA
PA31	11	I/O	GPIOA_31 / SPI0_CS	√	√	√
PB0	12	I/O	GPIOB_0 / ADC5 / I2C	√	√	√
PB1	13	I/O	GPIOB_1 / TOUCH4_ADC4 / I2C	√	√	√
PB2	14	I/O	GPIOB_2 / SPI1_CLK	√	√	√

PB3	15	I/O	GPIOB_3 / SPI1_MOSI	√	√	√
PB4	16	I/O	GPIOB_4 / SPI1_MISO	√	√	√
PB5	17	I/O	GPIOB_5 / SPI1_CS	√	√	√
PB6	18	I/O	GPIOB_6 / PWM	√	√	√
GND	19	P	Ground	NA	NA	NA
PB7	20	I/O	GPIOB_7	√	√	√
PB8	21	I/O	GPIOB_8	√	√	√
PB9	22	I/O	GPIOB_9	√	√	√
PB10	23	I/O	GPIOB_10	√	√	√
GND	24	P	Ground	NA	NA	NA
VD33	25	P	Power Supply	NA	NA	NA
GND	26	P	Ground	NA	NA	NA
NC	27	NC	NC	NA	NA	NA
NC	28	NC	NC	NA	NA	NA
NC	29	NC	NC	NA	NA	NA
CHIP_EN	30	I	● High: Enable the chip. ● Low: Module power off.	NA	NA	NA
PA0	31	I/O	GPIOA_0	√	√	√
PA1	32	I/O	GPIOA_1	NA	NA	NA
NC	33	NC	NC	NA	NA	NA
PA11	34	I/O	GPIOA_11	√	√	√
PA12	35	I/O	GPIOA_12 / PA_EN	√	√	√
GND	36	P	Ground	NA	NA	NA
LINEOUTN	37	A	Line-out negative	NA	NA	NA
LINEOUTP	38	A	Line-out positive	NA	NA	NA
MICIN3N	39	A	MIC3 input negative	NA	NA	NA
MICIN3P	40	A	MIC3 input positive	NA	NA	NA
MICIN2P	41	A	MIC2 input positive	NA	NA	NA
MICIN2N	42	A	MIC2 input negative	NA	NA	NA
MICIN1P	43	A	MIC1 input positive	NA	NA	NA
MICIN1N	44	A	MIC1 input negative	NA	NA	NA
MICBIAS	45	P	MIC bias voltage output	NA	NA	NA
GND	46	P	Ground	NA	NA	NA
PA19	47	I/O	UART_LOG_RXD	NA	NA	NA
PA20	48	I/O	UART_LOG_TXD	NA	NA	NA
PA21	49	I/O	GPIOA_21 / LEDC	√	√	√
PA22	50	I/O	GPIOA_22 / LEDC	√	√	√
NC	51	NC	NC	NA	NA	NA
GND	52	P	Ground	NA	NA	NA
RF_1	53	A	RFIO	NA	NA	NA
GND	54	P	Ground	NA	NA	NA

NOTE

- **P:** power supply
- **I:** input
- **I/O:** input/output
- **A:** Analog
- Detail Available pin refer to " PKM8713ECM_pin_mux.xls " table

3.2.2 Strapping Pins

This module has 3 strapping pins.

Table 2. Strapping Pin

Pin Name	Pin No.	Default State	Description
PA1	32	Pull up	1: Normal mode (default) 0: Test mode

PA20	48	Pull up	1: Normal mode (default) 0: Flash download mode
PA22	50	Pull up	1: power supply option 1 0: power supply option 2 (default)

4 RF Characteristic

4.1 Wi-Fi Radio Standard

Table 3. Wi-Fi Radio Standard

Wi-Fi Wireless Standard	Description
Wi-Fi frequency range	● 2412MHz ~ 2484MHz (2.4GHz ISM Band)
Wi-Fi wireless standard	IEEE 802.11 b/g/n/ax
Wi-Fi wireless standard Modulation	DSSS/CCK/BPSK/QPSK/16-QAM/64-QAM/256QAM
Wi-Fi wireless data rate	● 802.11 b: 1/2/5.5/11 Mbps ● 802.11 g: 6/9/12/18/24/36/48/54 Mbps ● 802.11 n: HT20 MCS0-7 ● 802.11 ax: HE20 MCS0-9

4.1.1 Wi-Fi 2.4GHz Band RF Transmitter Specification

Table 4. Wi-Fi 2.4GHz Transmitter Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2412		2484	MHz
Output power with spectral mask and EVM compliance[1] (25°C)	1Mbps CCK		20		dBm
	11Mbps CCK		20		dBm
	BPSK rate 1/2, 6Mbps OFDM		20		dBm
	64-QAM rate 3/4, 54Mbps OFDM		19		dBm
	HT20, MCS 0, BPSK rate 1/2		20		dBm
	HT20, MCS 7, 64-QAM rate 5/6		18		dBm
	HE20, MCS 8, 256-QAM rate 3/4		17		dBm
	HE20, MCS 9, 256-QAM rate 5/6		16		dBm
Tx EVM	BPSK rate 1/2, 6Mbps OFDM		-32	-5	dB
	64-QAM rate 3/4, 54Mbps OFDM		-34	-25	dB
	HT20, MCS 0, BPSK rate 1/2		-32	-5	dB
	HT20, MCS 7, 64-QAM rate 5/6		-35	-27	dB
	HE20, MCS 8, 256-QAM rate 3/4		-36	-30	dB
	HE20, MCS 9, 256-QAM rate 5/6		-36	-32	dB
Output power variation	TSSI on across operating temperature range, all channels and VSWR ≤ 1.5:1 at RFIO port	-1.5		1.5	dB
Carrier Suppression			-	-32	dBc
Harmonic output power[2]	2nd Harmonic		-21		dBm/MHz
	3rd Harmonic		-20		dBm/MHz
Harmonic output power[3]	2nd Harmonic			-50	dBm/MHz
	3rd Harmonic			-50	dBm/MHz

NOTE

- [1] Power level is tested after Digital Pre-Distortion (DPD) enable.
- [2] Harmonic output power is tested at IC port.
- [3] Harmonic output power is measured at RF connector with pi-shape LC low pass filter.

4.1.2 Wi-Fi 2.4GHz Band RF Receiver Specification

Table 5. Wi-Fi 2.4GHz Receiver Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2412		2484	MHz

802.11b Rx Sensitivity (8% PER)	1 Mbps CCK		-100		dBm
	2 Mbps CCK		-97		dBm
	5.5 Mbps CCK		-94		dBm
	11 Mbps CCK		-91		dBm
802.11g Rx Sensitivity (10% PER)	BPSK rate 1/2, 6Mbps OFDM		-95		dBm
	BPSK rate 3/4, 9Mbps OFDM		-94		dBm
	QPSK rate 1/2, 12Mbps OFDM		-92.5		dBm
	QPSK rate 3/4, 18Mbps OFDM		-90		dBm
	16-QAM rate 1/2, 24Mbps OFDM		-87		dBm
	16-QAM rate 3/4, 36Mbps OFDM		-83.5		dBm
	64-QAM rate 1/2, 48Mbps OFDM		-79.5		dBm
	64-QAM rate 3/4, 54Mbps OFDM		-78		dBm
802.11n Rx Sensitivity (10% PER) BW=20MHz	MCS 0, BPSK rate 1/2		-95		dBm
	MCS 1, QPSK rate 1/2		-92.5		dBm
	MCS 2, QPSK rate 3/4		-90		dBm
	MCS 3, 16-QAM rate 1/2		-86.5		dBm
	MCS 4, 16-QAM rate 3/4		-83.5		dBm
	MCS 5, 64-QAM rate 2/3		-79.5		dBm
	MCS 6, 64-QAM rate 3/4		-78		dBm
	MCS 7, 64-QAM rate 5/6		-76.5		dBm
802.11ax Rx Sensitivity (10% PER) BW=20MHz	MCS 0, BPSK rate 1/2		-95		dBm
	MCS 1, QPSK rate 1/2		-92		dBm
	MCS 2, QPSK rate 3/4		-89.5		dBm
	MCS 3, 16-QAM rate 1/2		-86.5		dBm
	MCS 4, 16-QAM rate 3/4		-83		dBm
	MCS 5, 64-QAM rate 2/3		-79		dBm
	MCS 6, 64-QAM rate 3/4		-78		dBm
	MCS 7, 64-QAM rate 5/6		-76.5		dBm
	MCS 8, 256-QAM rate 3/4		-72.5		dBm
	MCS 9, 256-QAM rate 5/6		-70.5		dBm
Maximum Receive Level	6Mbps OFDM		0		dBm
	54Mbps OFDM		0		dBm
	11n MCS 0 HT20		0		dBm
	11n MCS 7 HT20		0		dBm
	11ax MCS 0 HE20		0		dBm
	11ax MCS 9 HE20		0		dBm
Adjacent Channel Rejection	11Mbps CCK		46		dBm
	BPSK rate 1/2, 6Mbps OFDM		45		dBm
	64-QAM rate 3/4, 54Mbps OFDM		25		dBm
	HT20, MCS 0, BPSK rate 1/2		42		dBm
	HT20, MCS 7, 64-QAM rate 5/6		24		dBm
	HE20, MCS 0, BPSK rate 1/2		42		dBm
	HE20, MCS 8, 256-QAM rate 3/4		20		dBm
	HE20, MCS 9, 256-QAM rate 5/6		17		dBm

4.2 Bluetooth Radio Standard

4.2.1 Bluetooth BR RF Transmitter Specification

Table 6. Bluetooth BR Transmitter Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2402	2441	2480	MHz
Max. Transmit Power	At max. power output level		8		dBm
Gain step			4		dB
Modulation Characteristics	ΔF1 Avg.		165		kHz
	ΔF2 Max. (for at least 99.9% of all ΔF2 max.)	115		-	kHz

	$\Delta F2 \text{ Avg.}/\Delta F1 \text{ Avg}$		0.93		
ICFT	Initial carrier frequency tolerance		± 15		kHz
Carrier Frequency Drift	One slot packet (DH1)		± 10		kHz
	Two slot packet (DH3)		± 10		kHz
	Five slot packet (DH5)		± 10		kHz
	Max. drift rate		± 10		kHz
Tx Output Spectrum	20dB bandwidth			1000	kHz
Adjacent Channel Power	$\pm 2\text{MHz}$ offset		-55		dBm
	$\pm 3\text{MHz}$ offset		-57		dBm
	$>\pm 3\text{MHz}$ offset		-59		dBm

4.2.2 Bluetooth BR RF Receiver Specification

Table 7. Bluetooth BR Receiver Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2402	2441	2480	MHz
Receiver Sensitivity	BER<0.1%		-94.5		dBm
Max. Usable Signal	BER<0.1%		0		dBm
C/I co-channel (BER<0.1%)	Co-channel sensitivity		9		dB
C/I 1MHz (BER<0.1%)	Adjacent channel selectivity		-17		dB
C/I 2MHz (BER<0.1%)	2nd adjacent channel selectivity		-46		dB
C/I 3MHz (BER<0.1%)	3rd adjacent channel selectivity		-53		dB
C/I Image Channel (BER<0.1%)	Image channel selectivity		-22		dB
C/I Image 1MHz (BER<0.1%)	1MHz adjacent to image channel selectivity		-31		dB
Inter-modulation			-33		dBm
Out-of-band blocking	30MHz to 2000MHz	-10			dBm
	2000MHz to 2400MHz	-27			dBm
	2500MHz to 3000MHz	-27			dBm
	3000MHz to 12.75GHz	-10			dBm

4.2.3 Bluetooth EDR RF Transmitter Specification

Table 8. Bluetooth EDR Transmitter Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2402	2441	2480	MHz
Max. Transmit Power	$\pi/4$ DQPSK			10	dBm
	8PSK			10	dBm
Relative Transmit Power	$\pi/4$ DQPSK		8		dBm
	8PSK		8		dBm
Frequency Stability	Max. carrier frequency stability, ω_o	$\pi/4$ DQPSK	0		kHz
		8PSK	0		kHz
	Max. carrier frequency stability, ω_i	$\pi/4$ DQPSK	± 10		kHz
		8PSK	± 10		kHz
	Max. carrier frequency stability, $ \omega_o + \omega_i $	$\pi/4$ DQPSK	± 10		kHz
		8PSK	± 10		kHz
Modulation Accuracy	RMS DEVM	$\pi/4$ DQPSK		20	%
		8PSK		13	%
	99% DEVM	$\pi/4$ DQPSK		30	%
		8PSK		20	%
	Peak DEVM	$\pi/4$ DQPSK		35	%
		8PSK		25	%
In-Band	$\pm 1\text{MHz}$ offset	$\pi/4$ DQPSK	-42		dB
	$\pm 1\text{MHz}$ offset	8PSK	-42		dB

Spurious Emissions	±2MHz offset	$\pi/4$ DQPSK		-46		dBm
	±2MHz offset	8PSK		-46		dBm
	±3MHz offset	$\pi/4$ DQPSK		-48		dBm
	±3MHz offset	8PSK		-48		dBm

4.2.4 Bluetooth EDR RF Receiver Specification

Table 9. Bluetooth EDR Receiver Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2402	2441	2480	MHz
Receiver Sensitivity (BER < 0.007% after 1600000 bits/BER < 0.01% after 16000000 bits)	$\pi/4$ DQPSK		-94.4		dBm
	8PSK		-88.1		dBm
Max. Usable Signal (BER<0.1%)	$\pi/4$ DQPSK		0		dBm
	8PSK		0		dBm
C/I co-channel (BER<0.1%)	$\pi/4$ DQPSK		8		dB
	8PSK		15		dB
C/I 1MHz (BER<0.1%)	$\pi/4$ DQPSK		-15		dB
	8PSK		-8		dB
C/I 2MHz (BER<0.1%)	$\pi/4$ DQPSK		-47		dB
	8PSK		-41		dB
C/I 3MHz (BER<0.1%)	$\pi/4$ DQPSK		-54		dB
	8PSK		-48		dB
C/I Image Channel (BER<0.1%)	$\pi/4$ DQPSK		-23		dB
	8PSK		-21		dB
C/I Image 1MHz (BER<0.1%)	$\pi/4$ DQPSK		-31		dB
	8PSK		-28		dB

4.2.5 Bluetooth LE RF Transmitter Specification

Table 10. Bluetooth LE Transmitter Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2402	2440	2480	MHz
Output Power	At max. power output level		8	10	dBm
Carrier Frequency Offset and Drift	Frequency offset		±10		kHz
	Frequency drift		±10	-	kHz
	Max. drift rate		±10	-	kHz
Modulation Characteristics	ΔF1 Avg.		250		kHz
	ΔF2 Max.	185	-	-	kHz
	ΔF2 Avg./ΔF1 Avg		0.93	-	
In-Band Emissions	±2MHz offset		-51	-	dBm
	≥ ±3MHz offset		-53	-	dBm

4.2.6 Bluetooth LE RF Receiver Specification

Table 11. Bluetooth LE Receiver Performance Specification

Parameter	Condition	Performance			Unit
		Min.	Typ.	Max.	
Frequency Range	Center channel frequency	2402	2440	2480	MHz
Receiver Sensitivity	PER<30.8%		-99		dBm
Max. Usable Signal	PER<30.8%		0		dBm
C/I co-channel (PER<30.8%)	Co-channel sensitivity		5		dB
C/I 1MHz (PER<30.8%)	Adjacent channel selectivity		-7		dB

C/I 2MHz (PER<30.8%)	2nd adjacent channel selectivity		-48		dB
C/I >= 3MHz (PER<30.8%)	3rd adjacent channel selectivity		-56		dB
C/I Image Channel (PER<30.8%)	Image channel selectivity		-25		dB
C/I Image 1MHz (PER<30.8%)	1MHz adjacent to image channel selectivity		-29		dB
Inter-modulation			-27		dBm
Out-of-band blocking	30MHz to 2000MHz	-30		-	dBm
	2003MHz to 2399MHz	-35			dBm
	2484MHz to 2997MHz	-35			dBm
	3000MHz to 12.75GHz	-30		-	dBm

5 Module Electrical Characteristics

5.1 Module Operating Conditions

Table 12. Module Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Units
VCC	Power supply voltage	3.0	3.3	3.6	V
T _A	Ambient operating temperature	-20	-	85	°C
T _S	Storage temperature	-65	-	150	°C

5.2 Module DC Characteristics

Table 13. DC Characteristic (3.3V, 25°C)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
V _{IH}	IO input high voltage	V _{IO} [1]=3.3V ± 10%	2.0	-	-	V
V _{IL}	IO input low voltage	V _{IO} [1]=3.3V ± 10%	-0.3	-	0.8	V
V _{OH}	IO output high voltage	V _{IO} [1]=3.3V ± 10%	0.85*V _{IO}	-	-	V
V _{OL}	IO output low voltage	V _{IO} [1]=3.3V ± 10%	-	-	0.15*V _{IO}	V

i NOTE

[1] V_{IO} is the power supply for I/O pin.

6 Module Schematics

6.1 Module Internal Schematics

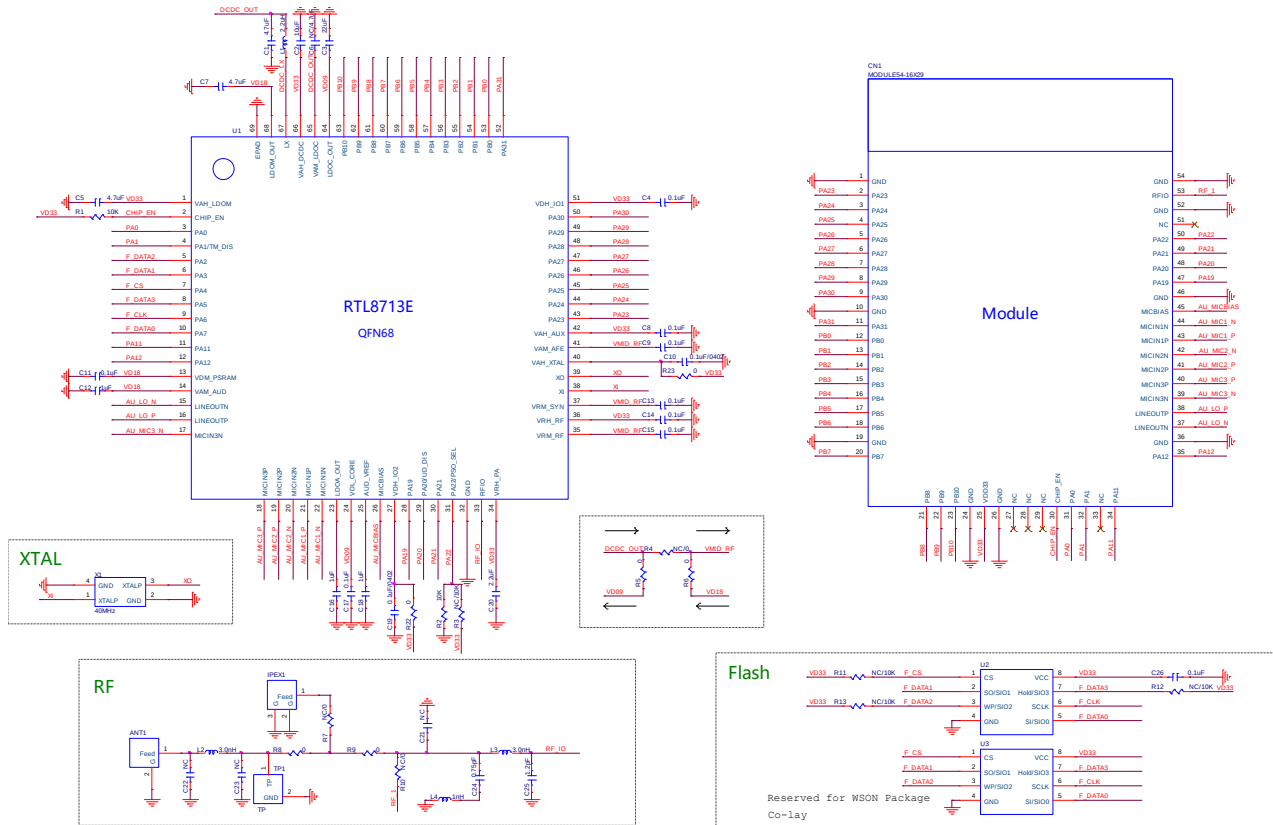


Figure 3. Module Internal Schematics

7 Physical Dimensions

Module dimension: $29 \pm 0.2\text{mm}$ (L) x $16 \pm 0.2\text{mm}$ (W) x $2.8 \pm 0.1\text{mm}$ (H)

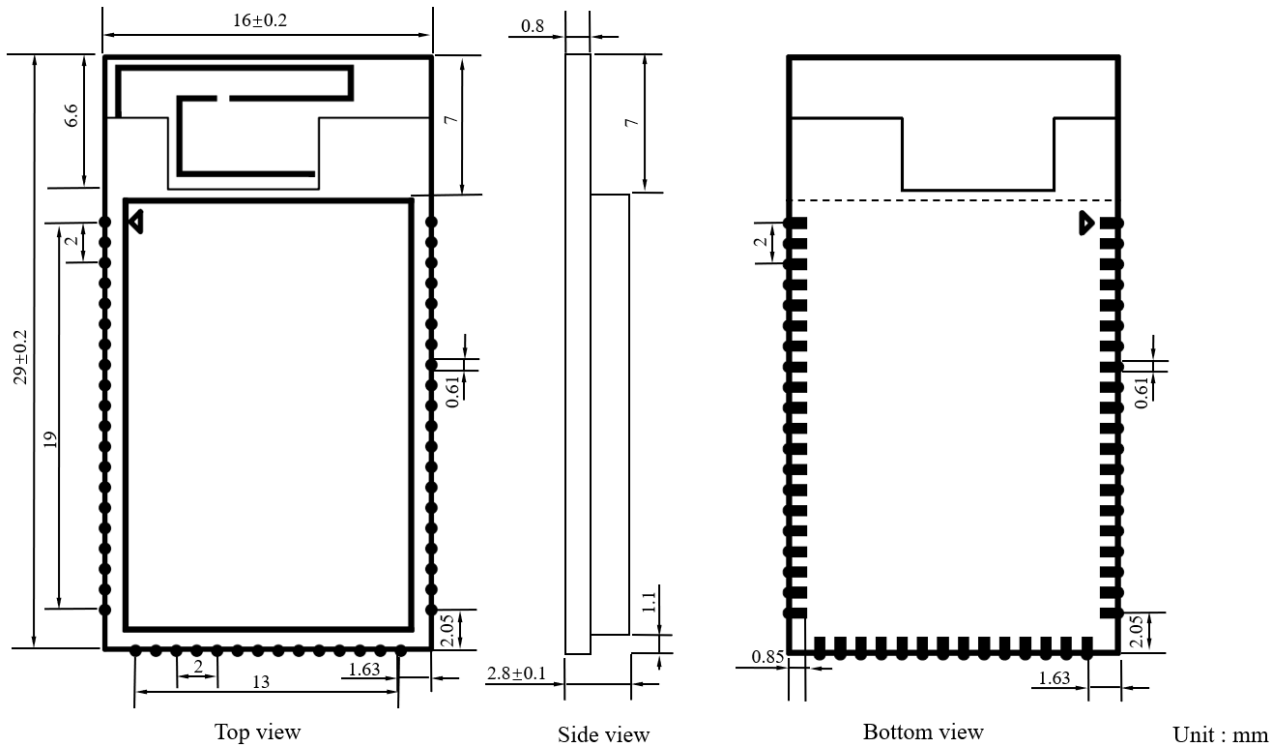



Figure 4. Module Physical Dimensions

8 Product Handling

8.1 Storage Conditions

The storage conditions for a delivered module:

- Moisture sensitive level (MSL): 3
- Calculated shelf life in sealed bag: 12 months at <40°C and <90% relative humidity (RH)
- Peak package body temperature: 260°C
- A humidity indicator card (HIC) in the packaging bag.

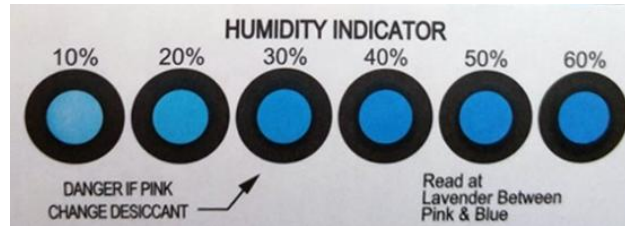

- After bag is opened, the module that will be subjected to reflow solder or other high temperature process must be
 - Mounted within: 168 hours of factory conditions ≤30°C/60% RH, or
 - Stored per J-STD-033
- The module needs to be baked in the following cases:
 - The packaging bag is damaged before unpacking.
 - There is no humidity indicator card (HIC) in the packaging bag.
 - After unpacking, circles of 10% and above on the HIC become pink.
 - The total exposure time has lasted for over 168 hours since unpacking.
 - More than 12 months have passed since the sealing of the bag.
- If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure.

NOTE

Level and body temperature are defined by IPC/JEDEC J-STD-020.

8.2 Production Instructions

- The PKM8713ECM-E10-F33 module can be packaged with the SMT process according to the customer's PCB designed to be SMT-packaged. After being unpacked, the module must be soldered within 24 hours. Otherwise, it needs to be put into the drying cupboard where the relative humidity is not greater than 10%; or it needs to be packaged again under vacuum and the exposure time needs to be recorded (the total exposure time cannot exceed 168 hours).
 - SMT devices needed:
 - ◆ Mounter
 - ◆ SPI
 - ◆ Reflow soldering machine
 - ◆ Thermal profiler
 - ◆ Automated optical inspection (AOI) equipment
 - Baking devices needed:
 - ◆ Cabinet oven
 - ◆ Anti-electrostatic and heat-resistant trays
 - ◆ Anti-electrostatic and heat-resistant gloves
- Baking settings:
 - Temperature: 40°C and ≤ 5% RH for reel package and 125°C and ≤5% RH for tray package (use the heat-resistant tray rather than a plastic container)
 - Time: 168 hours for reel package and 12 hours for tray package
 - Alarm temperature: 50°C for reel package and 135°C for tray package
 - Production-ready temperature after natural cooling: < 36°C
 - Re-baking situation: If a module remains unused for over 168 hours after being baked, it needs to be baked again.
 - If a batch of modules is not baked within 168 hours, do not use the wave soldering to solder them. Because these modules are Level-3 moisture-sensitive devices, they are very likely to get damp when exposed beyond the allowable time. In this case, if they are soldered at high temperatures, it may result in device failure or poor soldering.
- In the whole production process, take electrostatic discharge (ESD) protective measures.

- To guarantee the passing rate, it is recommended to use the SPI and AOI to monitor the quality of solder paste printing and mounting.

8.3 Recommended Oven Temperature Curve

There are some differences between the set temperatures and the actual temperatures. All the temperatures listed in this datasheet are obtained through actual measurements.

For the SMT process, set oven temperatures according to Figure 5.

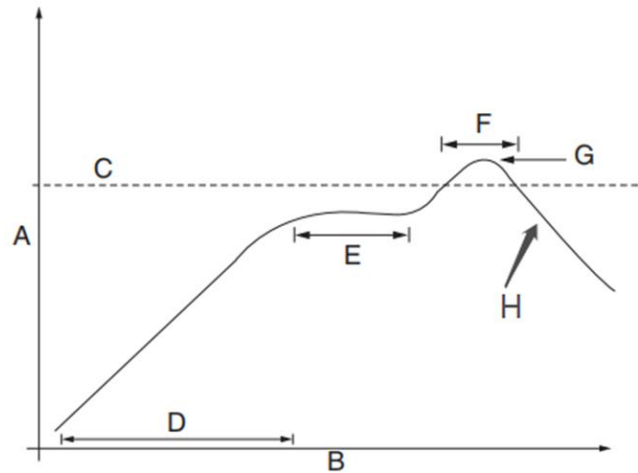


Figure 5. Reflow Soldering Curve Diagram

- D: Rising speed = $(1 \sim 3)^{\circ}\text{C/s}$, $20^{\circ}\text{C} \sim 150^{\circ}\text{C}$, 60s ~ 90s
- E: Average preheating temperature = $150^{\circ}\text{C} \sim 200^{\circ}\text{C}$, 60s ~ 120s
- F: Temperature fluctuation $> 217^{\circ}\text{C}$, 50s to 70s; peak temperature = $235^{\circ}\text{C} \sim 245^{\circ}\text{C}$
- H: Drop speed = $(1 \sim 4)^{\circ}\text{C/s}$

i NOTE

Adjust the balance time to ensure the rationalization treatment of gas when tin paste solves. If there are too much gaps on the PCB board, increase the balance time. Considering that the product is long placed in the welding area, to prevent components and bottom plate from damage.

9 Revision History

Data	Revision	Change Note
2025-07-03	1.0	Initial release
2025-07-18	1.1	Update RF characteristics
2025-09-25	1.2	Correct some formats